



CANCUN
ILS/DME 3 PISTA 12L
LOC PISTA 12L

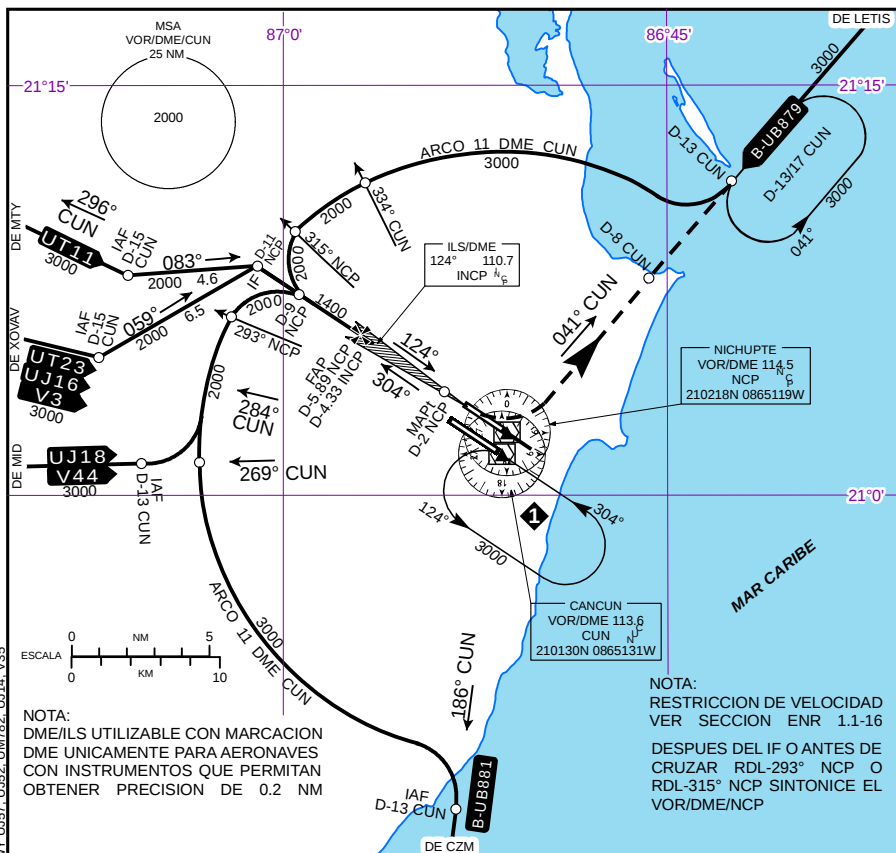

CAMBIOS:AWY UT23; RADIAL A CZM:HLDG; SIMBOLOGIA; DESIGNADOR; CNL AWY UJ57, UJ52 UM782, UJ14, V35

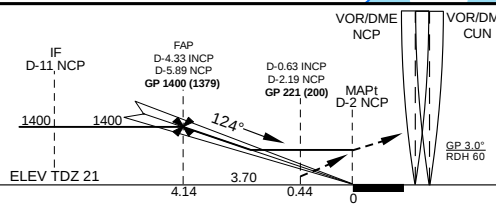

APROXIMACION FRUSTRADA

EFFECTUE VIRAJE A LA IZQUIERDA, CONTINUE
EN RADIAL-041° CUN (MANTENGA 2000 FT
HASTA D-8 CUN), PROSIGA EN ASCENSO
HASTA EL PATRON DE ESPERA D-13/17
CUN, HASTA ALCANZAR 3000 FT Y
MANTENGA DE ACUERDO A
INSTRUCCIONES DEL ATC.

DIRECTO PISTA 12L							
DA (DH) 221 (200)				MDA (MDH) 420 (399)			
CAT	ILS			LOC			
	COMPLETO		SIN ALS	ALS		SIN ALS	
A	1/2 (800 M)		3/4 (1200 M)	3/4 (1200 M)		1 (1600 M)	
B							
C				1 (1600 M)		1 1/4 (2000 M)	
D				1 1/4 (2000 M)		1 1/2 (2400 M)	
NO	DA (DH) 271 (250)		1 1/4 (2000 M)		1 1/2 (2400 M)		
REGULARES	3/4 (1200 M)		1 (1600 M)				
VELOCIDAD			(KTS)	60	80	100	
GP 3.0°			(FT/MIN)	318	424	530	
FAF AL THR 4.14 NM			(MIN:SEC)	4:08	3:06	2:29	

CAT	CIRCULANDO			
	CNL SECTOR "S" RWY 12L/30R			
	MDA (MDH)			
	A			
	B	480 (458) - 1	(1600 M)	
C	580 (558) - 1 1/2		(2400 M)	
D	580 (558) - 2		(3200 M)	
120	140	160	180	200
636	742	848	954	1060
2:04	1:46	1:33	1:23	1:14