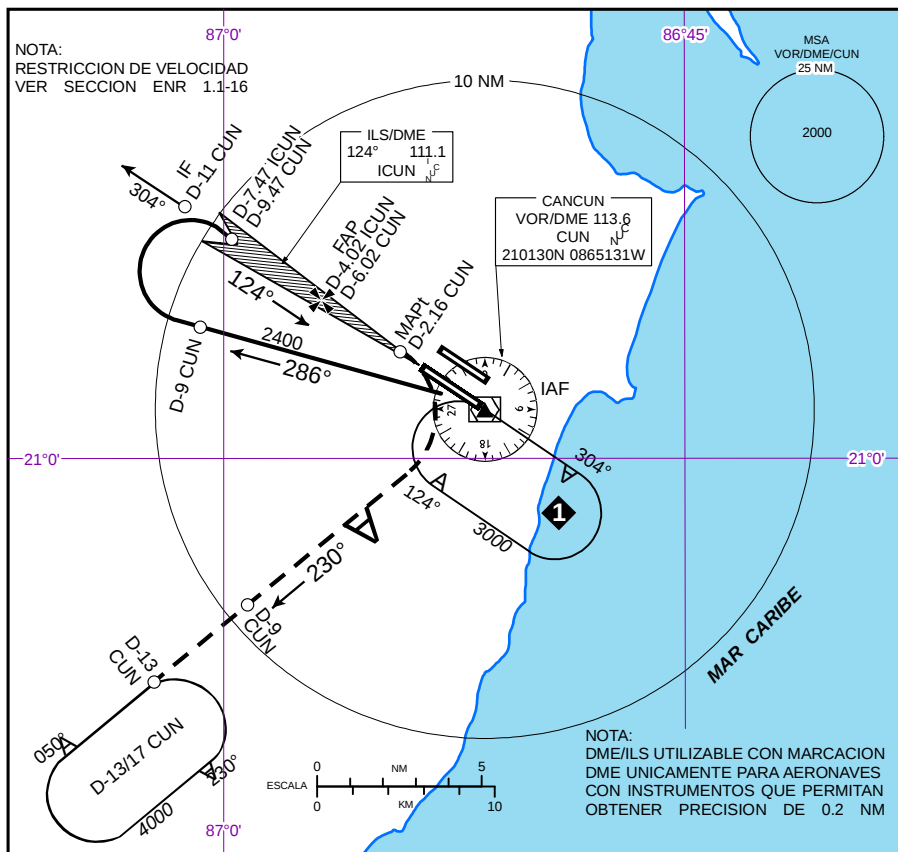


APROXIMACION FRUSTRADA

EFECTUE VIRAJE A LA DERECHA, CONTINUE
EN RADIAL-230° CUN (MANTENGA 2000 FT
HASTA D-9 CUN), PROSIGA EN ASCENSO
HASTA EL PATRON DE ESPERA D-13/17
CUN, HASTA ALCANZAR 4000 FT Y
MANTENGA DE ACUERDO A
INSTRUCCIONES DEL ATC.

DIRECTO PISTA 12R									
DA (DH) 220 (200)					MDA (MDH) 420 (400)				
CAT	ILS				LOC				
	COMPLETO		SIN ALS		ALS		SIN ALS		
A	1/2 (800 M)		3/4 (1200 M)		3/4 (1200 M)		1 (1600 M)		
B									
C					1 (1600 M)		1 1/4 (2000 M)		
D									
NO	DA (DH) 270 (250)				1 1/4 (2000 M)		1 1/2 (2400 M)		
REGULARES	3/4 (1200 M)		1 (1600 M)						
VELOCIDAD			(KTS)		60	80	100		
GP 30°			(FT/MIN)		318	424	530		
FAF AL THR 3.85 NM			(MIN:SEC)		3:51	2:53	2:18		

CAT	CIRCULANDO CNL SECTOR "N" RWY 12R/30L			
	MDA (MDH)			
	A			
	B	480 (458) - 1	(1600 M)	
	C	580 (558) - 1 1/2	(2400 M)	
	D	580 (558) - 2	(3200 M)	
120	140	160	180	200
636	742	848	954	1060
1:55	1:39	1:26	1:17	1:09