



CANCUN
ILS/DME 3 PISTA 12R
LOC PISTA 12R

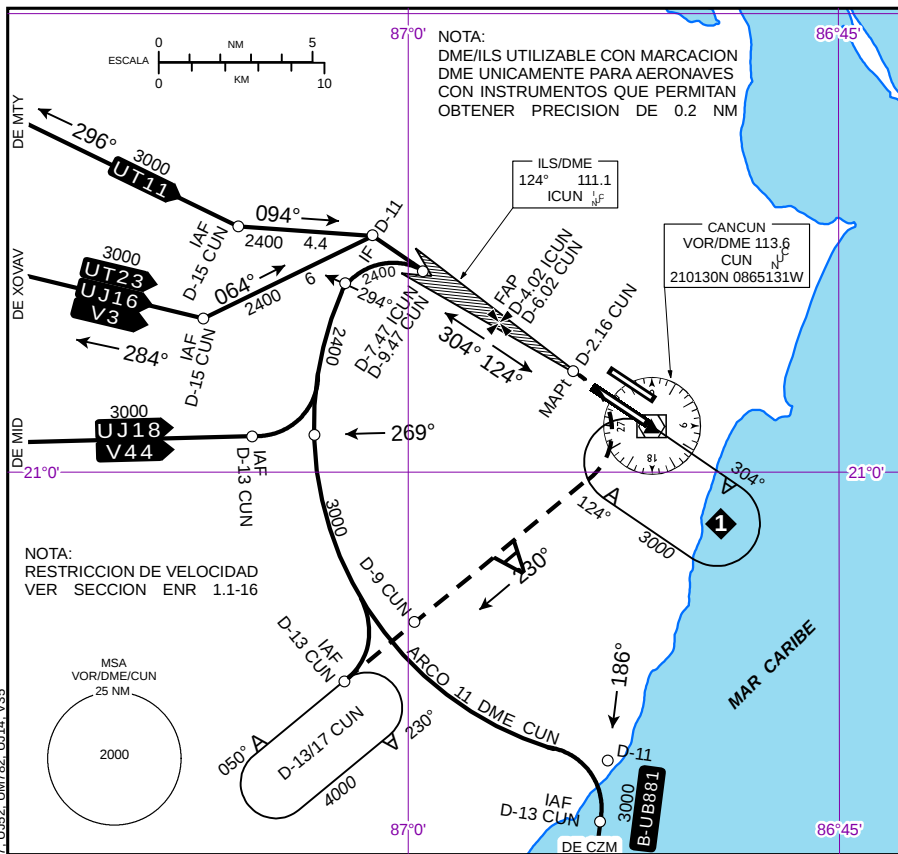

APROXIMACION FRUSTRADA

EFFECTUE VIRAJE A LA DERECHA, CONTINUE
EN RADIAL-230° CUN (MANTENGA 2000 FT
HASTA D-9 CUN), PROSIGA EN ASCENSO
HASTA EL PATRON DE ESPERA D-13/17
CUN, HASTA ALCANZAR 4000 FT Y
MANTENGA DE ACUERDO A
INSTRUCCIONES DEL ATC.

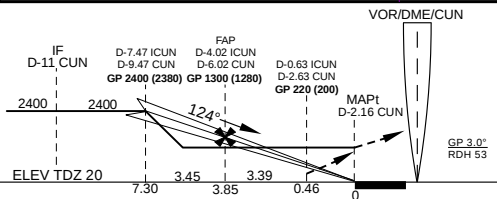

DIRECTO PISTA 12R									
DA (DH) 220 (200)					MDA (MDH) 420 (400)				
CAT	ILS			LOC					
	COMPLETO		SIN ALS	ALS		SIN ALS			
A	1/2 (800 M)		3/4 (1200 M)	3/4 (1200 M)		1 (1600 M)			
B									
C				1 (1600 M)		1 1/4 (2000 M)			
D									
NO	DA (DH) 270 (250)			1 1/4 (2000 M)		1 1/2 (2400 M)			
REGULARES	3/4 (1200 M)		1 (1600 M)						
VELOCIDAD			(KTS)	60	80	100			
GP 3.0*			(FT/MIN)	318	424	530			
FAF AL THR 3.85 NM			(MIN:SEC)	3:51	2:53	2:18			

CAT	CIRCULANDO CNL SECTOR "N" RWY 12R/30L			
	MDA (MDH)			
	A	480 (458) - 1 (1600 M)		
	B			
	C	580 (558) - 1 1/2 (2400 M)		
	D	580 (558) - 2 (3200 M)		
120	140	160	180	200
636	742	848	954	1060
1:55	1:39	1:26	1:17	1:09