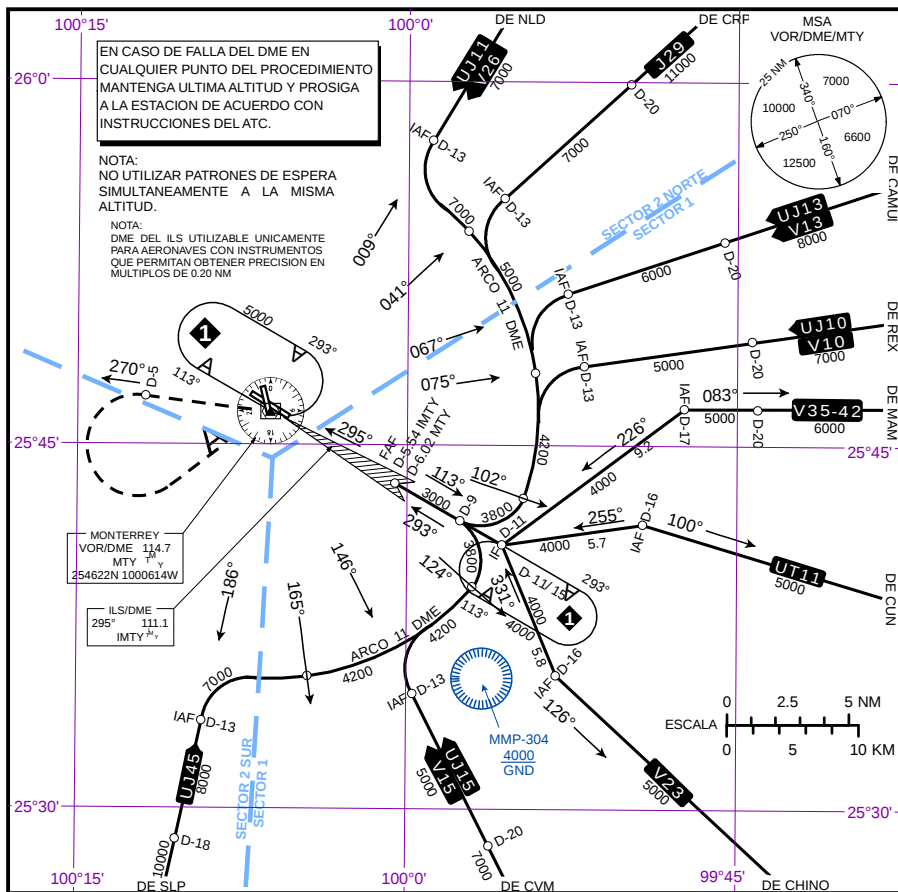


APROXIMACION FRUSTRADA

ASCIENDA EN RADIAL 270° HASTA D-5,
EFECTUE VIRAJE DE GOTA A LA
IZQUIERDA DENTRO DE 8 NM HACIA
EL VOR/DME/MTY HASTA LA ALTITUD
MINIMA DE ESPERA.

DIRECTO PISTA 29						
DA (DH) 1484 (250)			MDA (MDH) 1600 (324)			
CAT	ILS		LOC			
	COMPLETO	SIN ALS	COMPLETO	SIN ALS		
A						
B	1/2	3/4	1/2	1		
C	(800 M)	(1200 M)	(800 M)	(1600 M)		
D						
NO	DA (DH)	1534 (300)	3/4	1 1/4		
REGULARES	3/4 (1200 M)	1 (1600 M)	(1200 M)	(2000 M)		
VELOCIDAD		(KTS)	60	80	100	
GF 30"		(FT/MIN)	318	425	531	
FAP AL THR 5.36		(MIN:SEC)	5:22	4:01	3:13	

	CIRCULANDO				
CAT	MDA (MDH)				
A	1820 (544) - 1 (1600 M)				
B	1820 (544) - 1 1/2 (2400 M)				
C	1860 (584) - 2 (3200 M)				
D					
	120	140	160	180	200
	637	743	849	955	1061
	2:41	2:18	2:01	1:47	1:36