
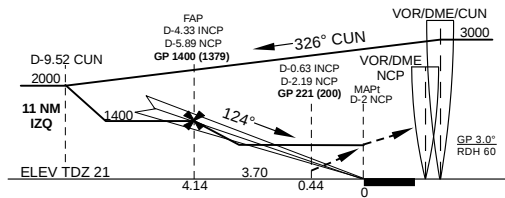


CANCUN
ILS/DME 2 PISTA 12L
LOC PISTA 12L

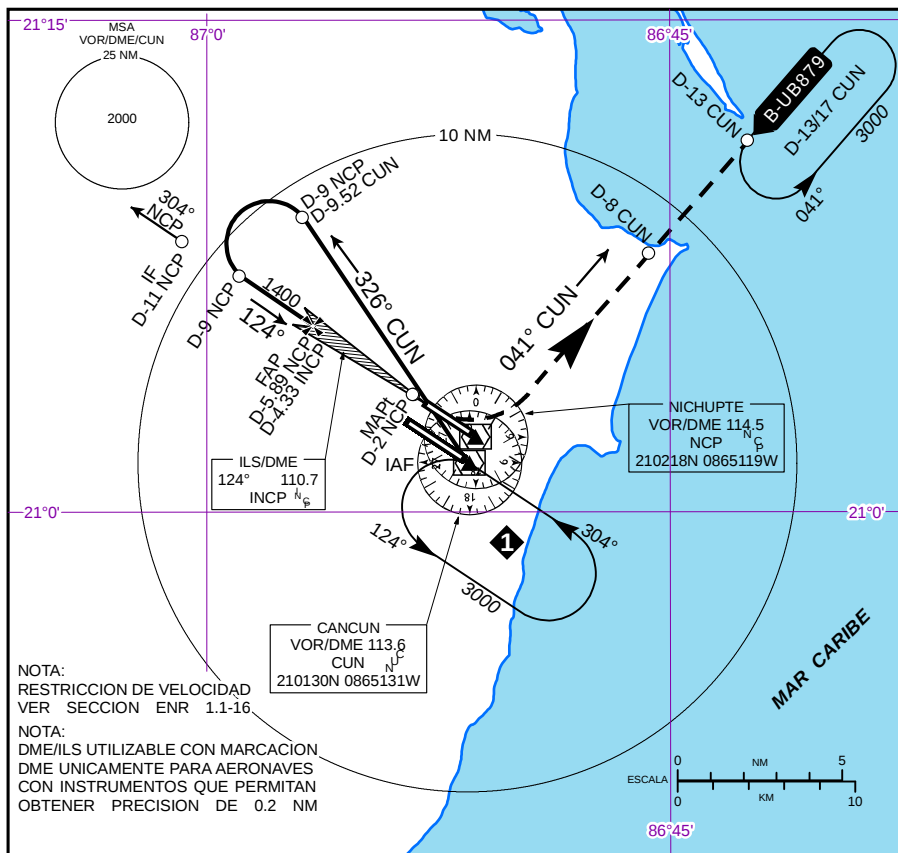

APROXIMACION FRUSTRADA

EFFECTUE VIRAJE A LA IZQUIERDA, CONTINUE EN RADIAL-041° CUN (MANTENGA 2000 FT HASTA D-8 CUN), PROSIGA EN ASCENSO HASTA EL PATRON DE ESPERA D-13/17 CUN, HASTA ALCANZAR 3000 FT Y MANTENGA DE ACUERDO A INSTRUCCIONES DEL ATC.

DIRECTO PISTA 12L							
DA (DH) 221 (200)				MDA (MDH) 420 (399)			
CAT	ILS			LOC			
	COMPLETO		SIN ALS	ALS		SIN ALS	
A	1/2 (800 M)		3/4 (1200 M)	3/4 (1200 M)		1 (1600 M)	
B							
C				1 (1600 M)		1 1/4 (2000 M)	
D				1 1/4 (2000 M)		1 1/2 (2400 M)	
NO	DA (DH) 271 (250)			1 1/4 (2000 M)		1 1/2 (2400 M)	
REGULARES	3/4 (1200 M)		1 (1600 M)				
VELOCIDAD			(KTS)	60	80	100	
GP 30°			(FT/MIN)	318	424	530	
FAF AL THR 4.14 NM			(MIN:SEC)	4:08	3:06	2:29	

CAT	CIRCULANDO CNL SECTOR "S" RWY 12L/30R MDA (MDH) _____				
	A				
	B	480 (458) - 1 (1600 M)			
	C	580 (558) - 1 1/2 (2400 M)			
	D	580 (558) - 2 (3200 M)			

120	140	160	180	200	
636	742	848	954	1060	
2:04	1:46	1:33	1:23	1:14	